

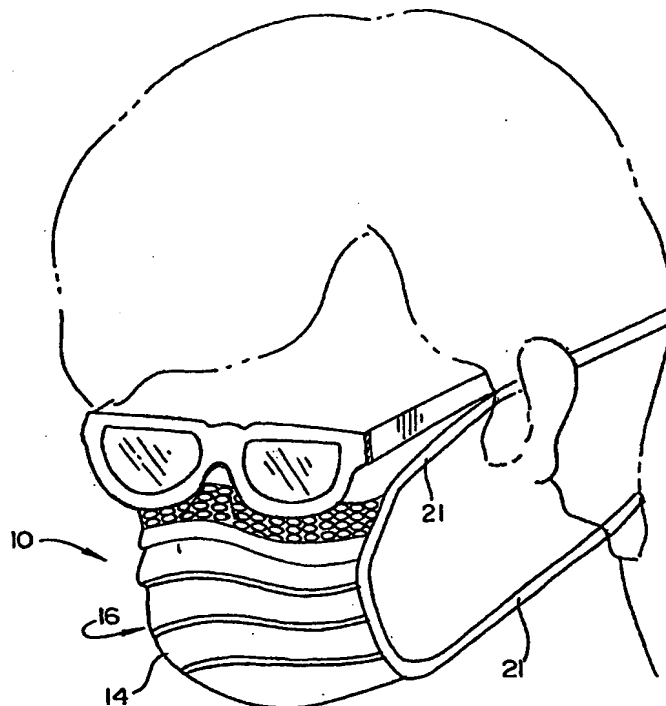


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A41D 13/00	A1	(11) International Publication Number: WO 99/47010 (43) International Publication Date: 23 September 1999 (23.09.99)
(21) International Application Number: PCT/US98/18217 (22) International Filing Date: 1 September 1998 (01.09.98) (30) Priority Data: 09/039,731 16 March 1998 (16.03.98) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: BAUMANN, Nicholas, R.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). DOWDELL, Shannon, L.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). SCHOLZ, Matthew, T.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). DUNSHEE, Wayne, K.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: SPRAGUE, Robert, W. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: ANTI-FOG FACE MASK**(57) Abstract**

A face mask (10) is disclosed that includes a mask portion (16), a resilient member (12) (e.g., a pillowed web), and, optionally, an adhesive portion (22). The resilient member (12) and the adhesive portion (22) are alternately positionable between the mask portion and the wearer to inhibit the passage of vapor between the mask and the wearer, which prevents fogging of the wearer's eyewear. A method for using the face mask is also disclosed.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China			PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ANTI-FOG FACE MASK

Background of the Invention

The present invention relates to inhibiting the passage of moisture between a face mask and a wearer's face.

5 Face masks serve many purposes including protecting the wearer from environmental contaminants and protecting those with whom the wearer comes into contact from the wearer's exhaled breath. It is often desirable to wear eyewear such as glasses, safety goggles, and face shields in conjunction with a face mask to obtain additional protection. Unfortunately, warm, moist air escaping from the
10 face mask tends to condense on eyewear causing fogging and, consequently, impairing visibility.

Summary of the Invention

In one aspect, the invention features a face mask that includes a mask
15 portion, a resilient member, and an adhesive portion. The resilient member and the adhesive portion are alternately positionable against the wearer (e.g., between the mask portion and the wearer), preferably to inhibit the flow of vapor between the mask and the wearer. The resilient member and the adhesive portion are also alternately positionable against the wearer to inhibit the flow of vapor between the
20 positioned resilient member or adhesive portion and the wearer.

The resilient member is preferably foldable such that, when folded, the resilient member is positionable between the mask portion and the wearer. In one embodiment, the resilient member is foldable onto the mask portion. The resilient member can also be folded onto itself. In other embodiments, when the resilient
25 member is folded, the adhesive portion is disposed between the resilient member and the mask portion. In some embodiments, the resilient member overlies the adhesive portion. When folded, the resilient member has a propensity to unfold.

In one embodiment, the resilient member includes a resilient exterior surface and an interior surface, and the adhesive portion is disposed on the interior
30 surface of the resilient member. The mask can further include a second adhesive portion disposed on the resilient exterior surface of the resilient member. In other

embodiments, the adhesive portion is disposed on the interior face-contacting surface of the mask portion.

The mask portion includes a major exterior mask surface, a major interior face-contacting surface, and an edge common to the interior and exterior mask surfaces. In one embodiment, the resilient member is affixed to the exterior mask surface and is dimensioned to be foldable over the common edge such that, when folded, the major interior surface of the resilient member is positionable against the wearer.

In preferred embodiments, the resilient member includes compacted higher density regions and pillowed lower density regions. The pillowed lower density regions are preferably displaced to one side of a plane defined by the base of the compacted higher density regions. The resilient member includes a matrix that includes the pillowed lower density regions and the compacted higher density regions. The compacted higher density regions preferably form a tortuous path.

One example of a useful resilient member is a nonwoven web that includes pressure sensitive adhesive microfibers.

The face mask can further include a variety of other components including a conformable strip (e.g., a conformable metal). The conformable strip can be disposed on the resilient member or affixed to the mask portion. The face mask can also include a release liner overlying the adhesive portion. In some embodiments, the resilient member is disposed on the release liner and is removable from the mask with the release liner to expose the adhesive portion.

In one embodiment, the face mask includes a filter, a resilient member of pillowed lower density regions and compacted higher density regions affixed to the filter, and an adhesive portion disposed on the resilient member.

In a second aspect, the invention features a face mask that includes a mask portion and a pillowed web affixed to the mask portion. The pillowed web includes a plurality of pillowed lower density regions and compacted higher density regions.

In a third aspect, the invention features a method for using the above-described face mask. The method includes selecting one of either the resilient member or the adhesive portion, and contacting a wearer with the selected resilient

member or adhesive portion to form a seal between the mask and the wearer. Preferably the contacting forms a vapor barrier to inhibit the passage of moisture between the mask and the wearer.

The resilient member, when in the form of a pillowed web in particular, provides loft through which the warm moist air of exhaled breath must travel. The loft enables the warm moist air to cool. The compacted lower density regions of the pillowed web construction provides a plurality of tortuous paths along which the exhaled breath is forced. The loft and tortuous paths assist in cooling the exhaled breath which aids in preventing the exhaled breath from fogging a wearer's eyewear.

The face mask provides a wearer with a choice between two alternate mechanisms for preventing the fogging of the wearer's eyewear in a single mask.

Other features and advantages of the invention will become apparent from the following description of the preferred embodiments thereof, and from the claims.

Brief Description of the Drawing

Fig. 1 is a plan view of the exterior surface of a face mask embodying the present invention.

Fig. 2 is a plan view of the interior face-contacting surface of the face mask of Fig. 1.

Fig. 3 is a perspective view of the mask of Figs. 1 and 2 positioned on a wearer's face, which is outlined in phantom.

Fig. 4a is a cross-section view taken along line 1-1' of the mask of Fig. 1.

Fig. 4b is the mask of Fig. 4a with the exception that the resilient member has been folded over the edge of the face mask.

Fig. 5a is a plan view of an illustrative pillowed microfiber web.

Fig. 5b is a perspective view partially in section of a portion of the illustrative pillowed microfiber web of Fig. 5a.

Figs. 6-8 are plan views of portions of collection screen patterns useful for making the pillowed webs.

Fig. 9a is a cross-section view taken along line 1-1' of a face mask

according to a second embodiment of the present invention.

Fig. 9b is the mask of Fig. 9a with the exception that the resilient member has been folded over the edge of the mask and the release liner has been removed.

Fig. 10a is a cross-section view taken along line 1-1' of a face mask
5 according to a third embodiment of the present invention.

Fig. 10b is a side view of an arrangement of a resilient member, a release liner, and an adhesive portion of the face mask of Fig. 10a.

Fig. 11 is a cross-section view taken along line 1-1' of a face mask
10 according to a fourth embodiment of the present invention.

Fig. 12 is a cross-section view taken along line 1-1' of a face mask
according to a fifth embodiment of the present invention.

Fig. 13 is a cross-section view taken along line 1-1' of a face mask
according to a sixth embodiment of the present invention.

Fig. 14 is a cross-section view taken along line 1-1' of a face mask
15 according to a seventh embodiment of the present invention.

Fig. 15 is a cross-section view taken along line 1-1' of a face mask
according to an eighth embodiment of the present invention.

Fig. 16 is a cross-section view taken along line 1-1' of a face mask
according to a ninth embodiment of the present invention.

Fig. 17 is an enlarged view of the two interlocking pillowed webs shown in
20 cross-section in Fig. 16.

Fig. 18a is a cross-section view of another illustrative pillowed web.

Fig. 18b is the pillowed web of Fig. 18a in a compressed configuration.

25 Description of the Preferred Embodiments

The face mask includes at least one anti-fog option for inhibiting the passage of moisture between the face mask and the wearer. When two or more anti-fog options are available, the options can be employed independently of each other and according to the wearer's preference.

30 Referring to Figs 1-4, face mask 10 includes mask portion 16, resilient member 12, and, optionally, adhesive portion 22. Resilient member 12 is positionable against a wearer's face to inhibit vapor, e.g., the moisture in exhaled

breath, from passing between the face mask 10 and the wearer's face. When the resilient member 12 is positioned against a wearer's face, such as between the wearer's nose and eyes, as shown in Fig. 3, moisture from exhaled breath is prevented from exiting the mask in a manner that would cause fogging of the
5 wearer's eyewear, e.g., eyeglasses, goggles, and face shields. The resilient member can assist in directing the exhaled breath into the layers of the mask, through the layers of the mask portion, into the loft of the resilient member, and into the space created at sides of the mask where the mask portion and wearer's face are not in sealing contact with each other.

10 An exterior view of face mask 10 is shown in Fig. 1. Fig. 2 is an interior view of face mask 10. Referring to Figs. 1-4, mask portion 16 has two major surfaces i.e., a major interior or face-contacting surface 24 and a major exterior surface 14. Mask portion 16 can also include binding 20 along its peripheral edges. Binding 20 can extend from the corners of the mask to provide tie strings
15 21 that can be tied at the back of the head of the wearer to secure the mask in a desired position.

Mask portion 16 includes one or more layers of material. Useful layer materials provide a variety of properties to the mask including, e.g., filtering capabilities, liquid resistance, liquid impermeability, and liquid imperviousness,
20 and combinations thereof. Suitable materials for use in the mask portion include standard face mask materials, e.g., woven and nonwoven fabrics (e.g., microfibrinous webs).

Resilient member 12 compresses when a force is exerted upon it and preferably substantially regains its original structure when the force is released.
25 Resilient member 12 has at least one major exterior surface 30, shown in Fig. 1, that is resilient and a major interior surface 28, shown in Fig. 2. Resilient member 12 is foldable (i.e., is capable of being doubled over on itself without breaking, tearing, rupturing or significant loss of structural integrity) into position between the mask portion and the wearer as shown, e.g., in Fig. 4b. Resilient member
30 preferably exhibits a propensity to unfold when the force holding the resilient member in a folded configuration is removed. For example, when resilient member 12 is folded and placed against a wearer's face, resilient member 12 will

partially unfold against the wearer's face, which causes a pressure to be applied against the resilient member and the wearer's face, further enhancing the efficiency of the vapor inhibiting function of the resilient member.

Resilient member 12 can be positioned on the mask portion in a variety of configurations. For example, resilient member 12 can be affixed to the major exterior surface 14 of mask portion 16 along opposing edges 34, 36 so that major exterior surface 14 of mask portion 16 and the interior surface 28 of the resilient member are in facing relation with each other, as shown in Figs. 4a, 4b, 9a, 9b and 13. Resilient member 12 can also be affixed to the interior face-contacting surface 24 of mask portion 16 as shown in Figs. 11-16. Alternatively, resilient member 12 can be an extension of the mask portion.

Referring to Figs. 4a and 4b, resilient member 12 is dimensioned to be foldable over edge 26 such that a sufficient amount of resilient member 12 is available for contact with a wearer's face to form a vapor barrier between the wearer's face and the mask.

Suitable materials for use in forming the resilient member include, e.g., foams, woven fabrics, and non-woven fibrous mats (e.g., microfiber webs). Preferred resilient materials are soft and pillowed, e.g., those webs having a network of compacted higher density regions 42 and pillowed lower density regions 44, as shown in Figs. 5a and 5b. The pillowed lower density regions 44 span the space between adjacent compacted regions 42. The pillowed lower density regions 44 are expanded and displaced away from a plane defined by the base of the compacted higher density regions 42 in an arched configuration. Preferably the pillowed lower density regions 44 are of a substantially uniform height so as to ensure that the crests of the pillowed regions will contact a wearer's skin, which will force the exhaled air to flow around the pillowed regions and along the desired random path. The pillowed lower density regions 44 and compacted higher density regions 42 can be formed in a variety of configurations including, e.g., irregularly aligned rows arranged such that the compacted higher density regions 42 form continuous nonlinear (e.g., tortuous) passageways. The pillowed lower density regions 44 and compacted higher density regions 42 can also be arranged in a matrix as shown, e.g., in Fig. 5a, wherein alternating rows

(e.g., 48 and 50) are offset and define a random tortuous path of higher density regions 42. Examples of suitable pillowed webs are described in U.S. Patent No. 4,103,058.

The pillowed non-woven web may be formed using conventional
5 techniques for preparing blown microfibers, such as melt blowing, solution blowing, and air laying. Preferably the pillowed web is prepared by melt blowing. Melt-blown microfiber webs can be prepared, for example, by the methods described in Wentz, San A., "Superfine Thermoplastic Fibers," Industrial Engineering Chemistry, Vol. 48, pp. 1342-46; Report No. 4364 for the Naval
10 Research Laboratories, Published May 25, 1954, entitled, "Manufacture of Superfine Organic Fibers," by Wentz et al.; and in U.S. Patent Nos. 3,971,373 (Braun), 4,100,324 (Anderson), 4,429,001 (Kolpin et al.), and 3,704,198 (Prentice). In addition, U.S. Patent No. 4,103,058 (Humlicek) describes methods of making pillowed webs using melt-blown and solution-blown techniques.

15 The pillowed web for resilient member 12 may also be formed by collecting blown microfibers on variously dimensioned screens. Such screens include those screens that are perforated so that microfibers deposited on the land area of the screen form the compacted higher density regions and microfibers deposited over the openings of the screen form the pillowed lower density regions.

20 Suitable collection screens are those in which the land area has connected linear areas, which vary in width up to 5 millimeters or more. Such collection screens generally provide webs of low overall density with good web integrity. The land area of useful collection screens can vary widely, from as little as 0.1% to 90% of the whole area of the screen. Preferably the land area is less than about
25 60% of the whole area of the screen, and can be about 1-5%. Where the land area is small, the opening size in the screen may also be small, for example, as small as 1 or 2 millimeters though it is usually 3 millimeters or more. Preferably the land area is minimized so as to provide a web with the lowest overall density and good web integrity. Useful collection screens can include a variety of patterns including
30 those patterns shown in Figs. 6-8.

The bulk of microfibers collected in a melt-blown operation have a mean fiber diameter less than about 10 μ m. The density of the pillowed regions vary

depending upon the height of the pillowed regions, the collection distance, the velocity of the gaseous stream carrying the microfibers to the collector, the rate at which the collection screen is moved through the gaseous stream, and the ratio of gas to polymer passed through the extrusion apparatus. The density of the pillowed regions can vary but useful webs have pillowed regions having a density of no greater than about 0.02 g/cc, and may have a density of no greater than about 0.004 g/cc.

The non-woven fibrous web may include polymeric microfibers, staple fibers, continuous fiber filament, or a combination thereof, with polymeric microfibers being preferred. Preferred polymers for forming fibers used in the construction of resilient member 12 include any fiber forming polymers that are capable of liquification, e.g., melting or dissolving, to the point where the viscosity of the polymer is sufficient for use in microfiber blowing operations. A preferred polymer for melt-blown microfibers is polypropylene. Other suitable polymers for melt-blown microfibers include, e.g., polyurethanes, polyolefins such as polypropylene, polyethylene, metallocene catalyst polyolefins, polyesters such as polyethylene terephthalate, polyamides such as nylon 6 and nylon 66, styrene-butadiene-styrene block copolymers commercially available under the trade designation Kraton from Shell Chemical Co., ethylene vinyl acetate, neoprene, natural rubber, polyvinyl acetate and its hydrolyzed derivatives, silicones, and derivatives thereof. Examples of polymers suitable for solution-blowing include such polymers as polyvinylchloride, polystyrene, polyarylsulfone, and combinations thereof. Inorganic materials may also be used to form the blown microfibers. Suitable inorganic materials include, e.g., ceramic alumina.

Face mask 10 can include an adhesive portion 22 for providing a second anti-fog option, as shown in Figs. 2, 4a, 4b, and 9-11. Adhesive portion 22 is located on face mask 10 in such a way that the adhesive portion is positionable against a wearer to inhibit the flow of vapor between face mask 10 and the wearer. For example, adhesive portion 22 can be disposed on interior surface 24 of mask portion 16 (e.g., as shown in Figs. 9a, 9b, 10a and 11), on a major surface 28, 30 of the resilient member 12 (e.g., as shown in Figs 4a and 4b), and in various combinations thereof.

Referring to Fig. 4a, adhesive portion 22 is disposed on face mask 10 such that resilient member 12 and adhesive portion 22 are alternately positionable against a wearer's face. In Figs. 2 and 4a adhesive portion 22 is in the form of an adhesive strip positioned along the top edge of mask 10 on interior surface 28 of resilient member 12. When worn, the adhesive portion is positioned across the nose in an area located between the wearer's eyes and the nostrils. Once positioned, the adhesive portion is pressed into contact with the wearer's skin to form a seal. The seal assists in inhibiting the flow of moisture between the face mask and the wearer's eyes, which inhibits fogging of the wearer's eyewear.

Adhesive portion 22 exhibits properties of adhesion, cohesion, stretchiness, and elasticity sufficient to seal the mask to a wearer's face such that when the adhesive is positioned between the wearer's nose and eyes exhaled breath cannot pass between the mask and the wearer's skin in sufficient quantities to fog the user's eyewear. The adhesive portion can be in a variety of forms including, e.g., a strip of adhesive composition, adhesive foam, pressure sensitive adhesive microfibers, and combinations thereof. Examples of suitable adhesive compositions include polyacrylate, polyurethane, natural rubber, polyisobutene, polybutadiene block copolymers such as, e.g., polybutadiene block copolymers available under the Kraton trade designation, silicone based adhesive compositions, and combinations thereof. Useful adhesive compositions include those adhesive compositions described in U.S. Patent No. 5,648,166, and acrylate based adhesives available from National Starch Adhesives.

Adhesive portion 22 can also be in the form of a plurality of pressure-sensitive adhesive microfibers located on or constituting at least a portion of the resilient member. The pressure-sensitive adhesive microfibers render the resilient member tacky and capable of adhesion to a wearer. Examples of useful pressure-sensitive adhesive microfibers and webs made from such microfibers are described in PCT Application No. US98/06596 filed April 3, 1998.

Optionally, the mask can include a conformable strip 32, e.g., a band, strip or wire, that is capable of being conformed, bent, shaped or molded, to the contours of a wearer's face, as shown in Figs. 2, in phantom in Fig. 3, and in cross-section in Figs. 4a, 4b, 9a and 9b. Conformable strip 32 can assist in forming a

seal between the mask portion and the wearer's face. Conformable strip 32 can be positioned on the mask or in the mask in a variety of configurations including, e.g., positioned between adhesive portion 22 and interior face-contacting surface 28 of resilient member 12 (e.g., Figs. 4a and 4b), between layers of the mask portion, and on the exterior surface of the mask. Suitable materials for the conformable strip include, e.g., metal strips, bands, or wires, and plastic coated metal strips, bands or wires.

The mask can also include a strip of adhesive that enhances nasal clearance, e.g., adhesive strips available under the trade designation Breathe-Right from CNS Inc.

Other embodiments are within the claims. Examples of other embodiments of face masks are also shown in cross-section in Figs. 9a-17. Features that are in common with mask 10 shown in Figs. 1-4 are designated with the same reference numerals.

Referring to Fig. 9a, face mask 50 includes resilient member 12 extending beyond edge 26, and cover 36 (e.g., a release liner) overlying and coextensive with adhesive portion 22. Cover 36 preferably has a low adhesion factor and overlies adhesive portion 22 to preserve and protect the adhesive properties of the adhesive portion. Cover 36 can be peeled back from adhesive portion 22 and removed when the user desires to utilize adhesive portion 22 as a vapor barrier. Preferred cover materials are flexible. Suitable cover materials include paper, plastic, plastic coated papers, and plastic coated papers treated to reduce surface energy, e.g., silicone, hydrocarbon, and fluorocarbon treated materials, and combinations thereof. Cover 36 can also be in the form of a strip of netting.

In Fig. 9b, cover 36 has been removed and resilient member 12 is folded over onto mask portion 16 such that adhesive portion 22 is sandwiched between the interior surface 28 of resilient member 12 and the interior face-contacting surface 24 of mask portion 16. When resilient member 12 is folded into contact with adhesive portion 22, the adhesive characteristics of adhesive portion 22 can assist in maintaining the resilient portion in a folded construction.

Figs. 10a and 10b show another embodiment of face mask 60 in which resilient member 12 is affixed to a release liner 46 positioned between adhesive

portion 22 and resilient member 12. Resilient member 12 and release liner 46 can be peeled away to expose adhesive portion 22. The exposed adhesive portion 22 is then available for positioning against the wearer.

Referring to Fig. 11, face mask 62 includes resilient member 12 positioned
5 such that resilient major surface 30 is affixed to exterior surface 14 of mask portion 16. Resilient member 12 is foldable over edge 26 of mask portion 16. When in a folded configuration, adhesive portion 22 is enveloped by resilient member 12 such that major surface 28 of resilient member 12 is available for contact with the
wearer.

10 Face mask 64, shown in Fig. 12, includes resilient member 12 secured to interior surface 24 of mask portion 16, and adhesive portion 22. When resilient member 12 is in a folded position, resilient surface 30 of resilient member 12 is in facing relation with itself, and major surface 28 of resilient member 12 is available
for contact with the wearer.

15 Other face masks 66, 68, and 70 are shown in Figs. 13-15. Face masks 66, 68 and 70 include mask portion 16, major exterior surface 14, major interior surface 24, and resilient member 12. The various major surfaces 28, 30 of resilient member 12 are shown affixed to the exterior surface 14 (Fig. 13) or interior surface 24 (Figs. 14 and 15) of mask portion 16.

20 Referring to Figs. 16 and 17, face mask 72 shown in cross-section includes two resilient members 52, 54 having pillowed lower density regions 44 and compacted higher density regions 42 arranged in an interlocking relationship with each other and secured to interior surface 24 of mask portion 16. Major surface 28
of resilient member 52 is available for contact with the wearer.

25 Referring to Fig. 18a, another resilient member 80 is shown in which the pillowed lower density regions 82 are generally spherical in shape. When compressed against a surface, spherical pillowed lower density regions 82 are pressed into the space above compacted higher density regions 84, as shown in Fig. 18b. When pillowed lower density regions 82 are compressed, the paths formed by
30 compacted higher density regions 84 become obstructed. Exhaled breath travelling along the paths formed by compacted higher density regions 84 encounters the

bulk of pillowed lower density regions 82 and is forced into pillowed lower density regions 82.

What is claimed is:

1. A face mask comprising:
 - (a) a mask portion;
 - (b) a resilient member; and
 - (c) an adhesive portion,said resilient member and said adhesive portion being alternately positionable against the wearer.
2. The face mask of claim 1, wherein said resilient member and said adhesive portion are alternately positionable against the wearer to inhibit the flow of vapor between the mask and the wearer.
3. The face mask of claim 1, wherein said resilient member and said adhesive portion are alternately positionable against the wearer to inhibit the flow of vapor between the positioned resilient member or adhesive portion and the wearer.
4. The face mask of claim 1, wherein said resilient member is foldable such that, when folded, said resilient member is positionable between said mask portion and the wearer.
5. The face mask of claim 1, wherein said resilient member is foldable onto said mask portion such that, when folded, said resilient member is positionable between said mask portion and the wearer.
6. The face mask of claim 1, wherein said resilient member is foldable onto itself such that, when folded, said resilient member is positionable between said mask portion and the wearer.
7. The face mask of claim 1, wherein said resilient member is foldable such that, when folded, said adhesive portion is disposed between said resilient member and said mask portion.

8. The face mask of claim 1, wherein said resilient member, when folded, has a propensity to unfold.

5 9. The face mask of claim 1, wherein said mask portion comprises:
a major exterior surface;
a major interior face-contacting surface; and
an edge common to said interior and exterior surfaces, said resilient
member being affixed to said exterior surface of said mask portion and
10 dimensioned to be foldable over said common edge such that, when folded, the
major interior surface of said resilient member is positionable against the wearer.

10. The face mask of claim 1, wherein said resilient member comprises
compacted higher density regions and pillowed lower density regions.

15 11. The face mask of claim 1, wherein said compacted higher density
regions form a tortuous path.

12. The face mask of claim 1 further comprising a conformable strip.

20

13. A face mask comprising:
(a) a mask portion; and
(b) a pillowed web affixed to said mask portion, said pillowed
web comprising pillowed lower density regions and compacted higher density
25 regions.

Fig.1

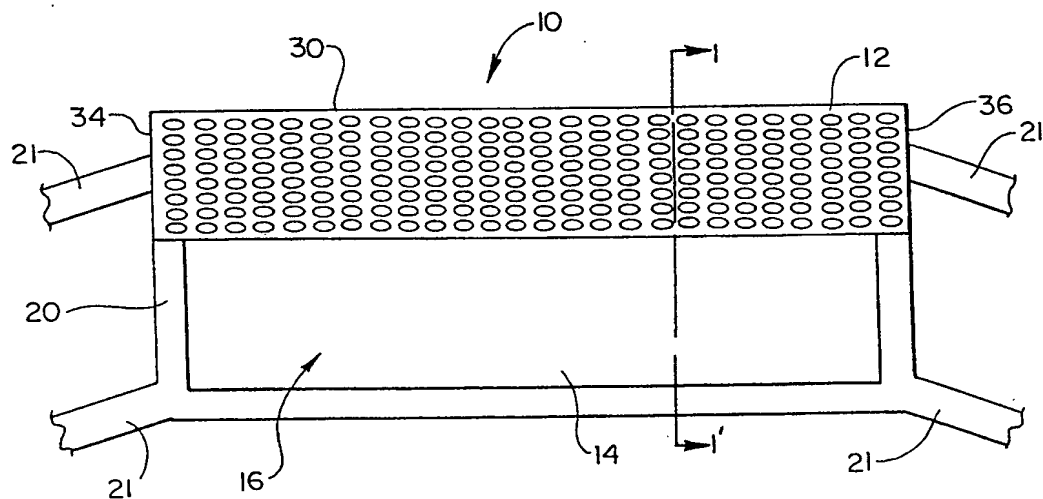


Fig.2

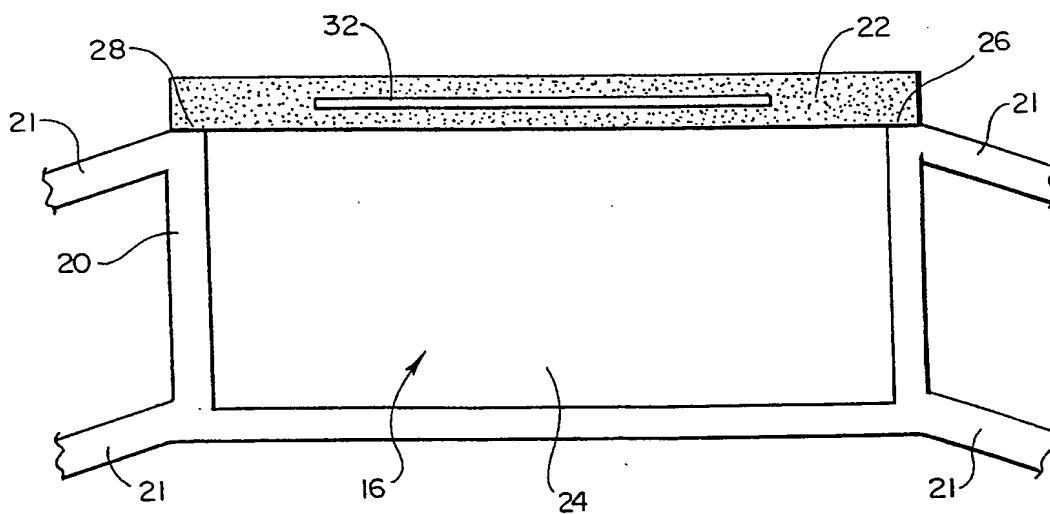
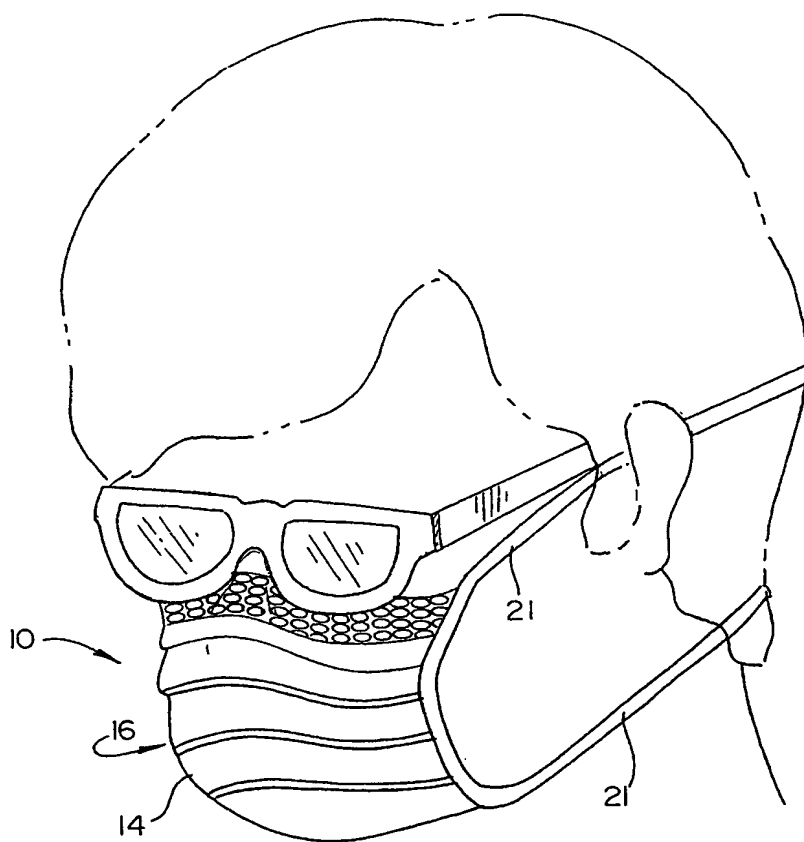


Fig. 3

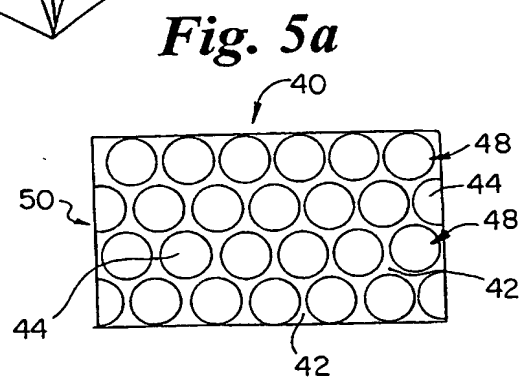
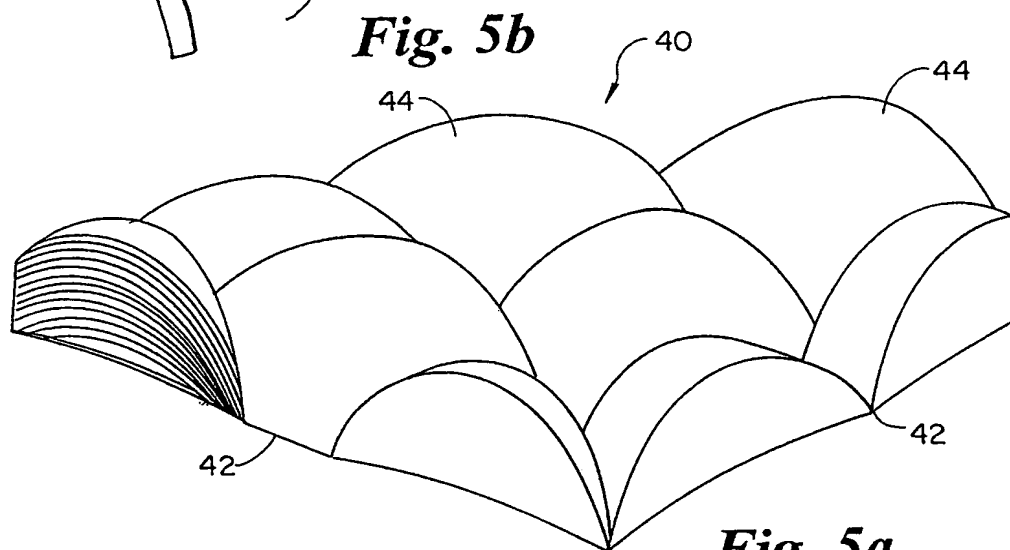
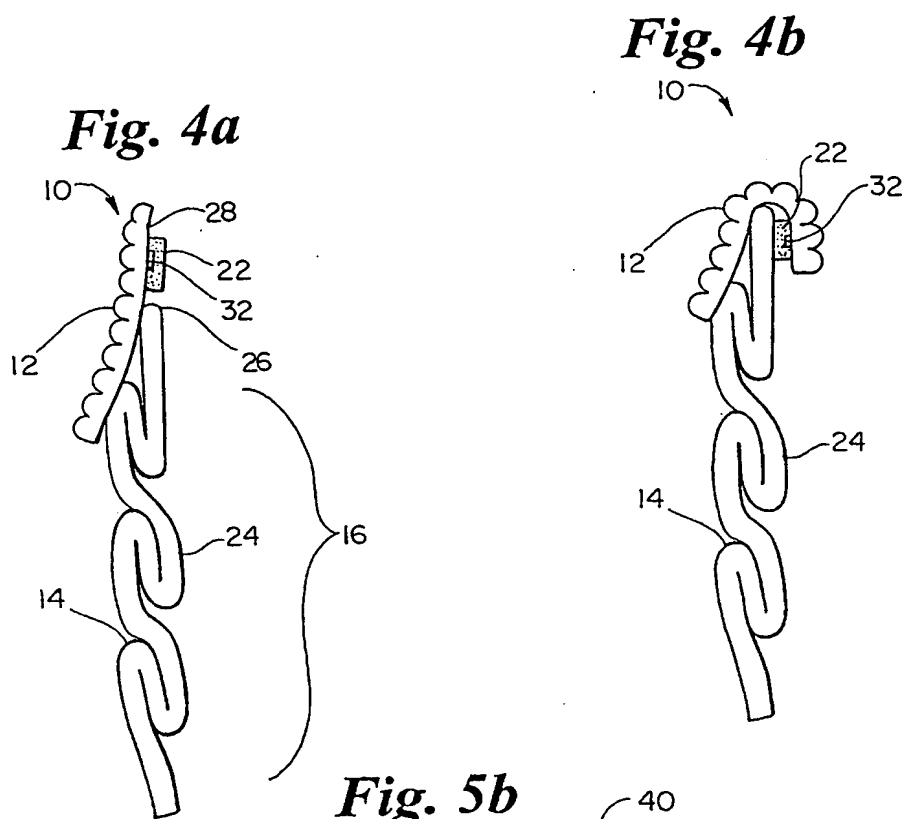


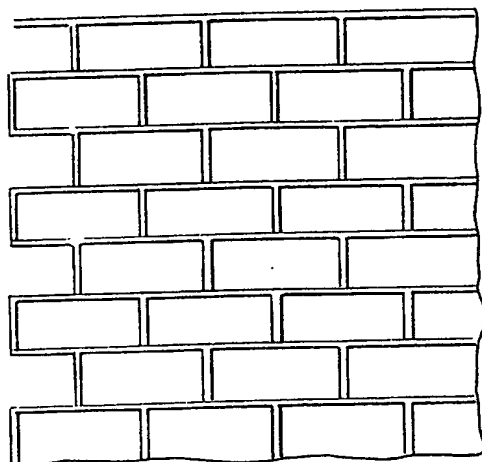
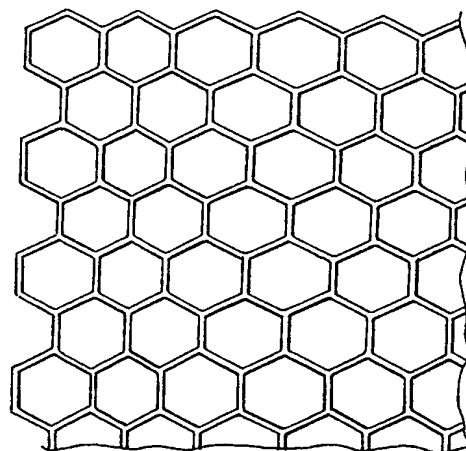

Fig. 6*Fig. 7**Fig. 8*

Fig. 9a

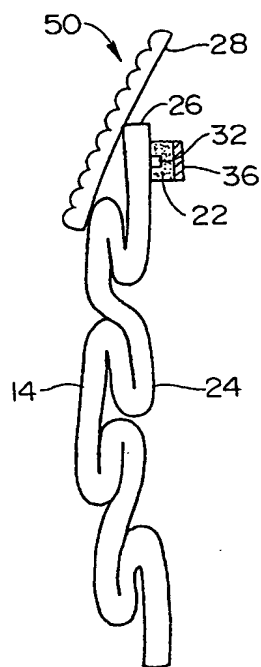


Fig. 9b

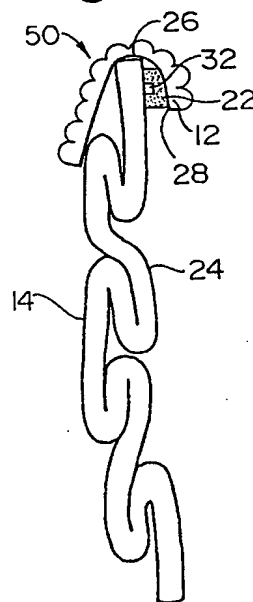


Fig. 10b

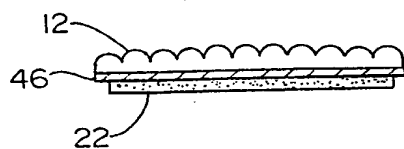


Fig. 10a

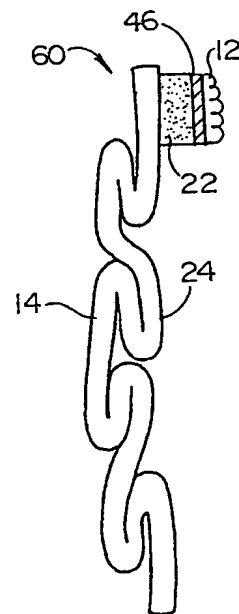


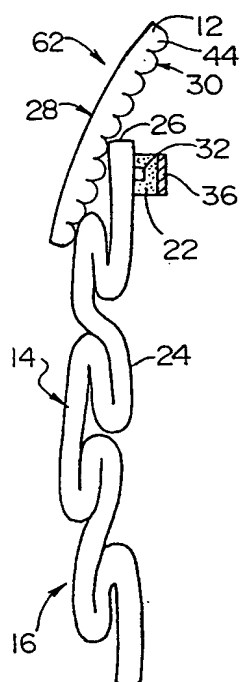
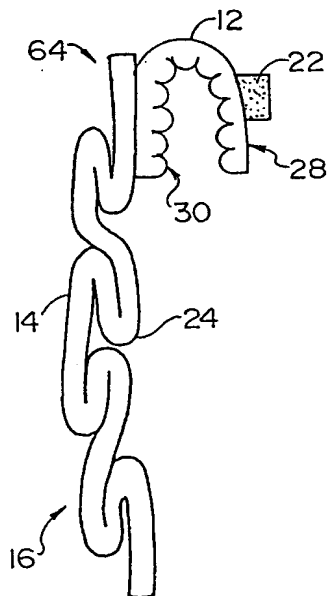
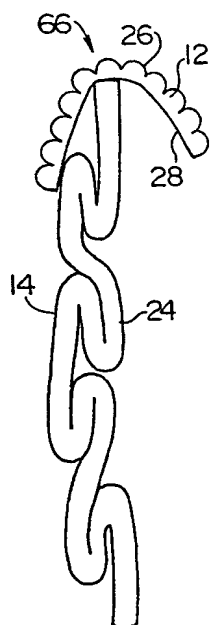
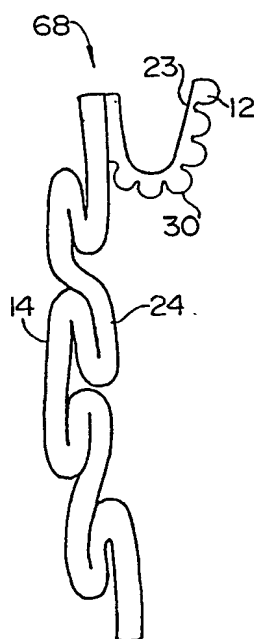
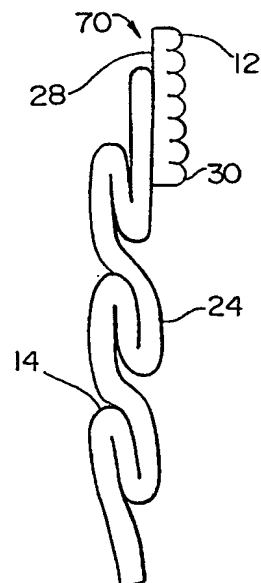
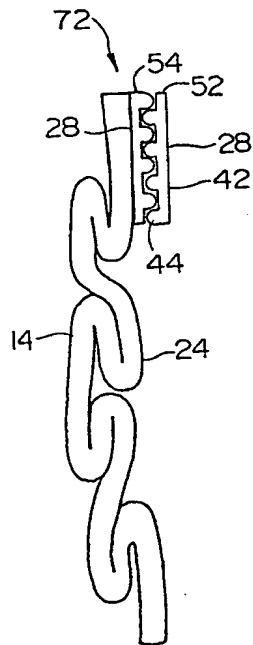
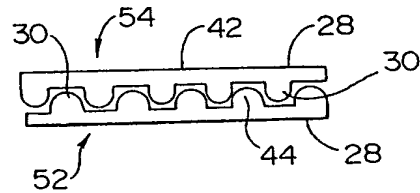
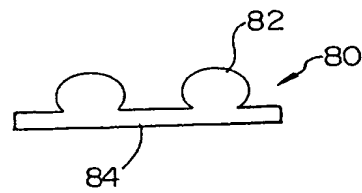
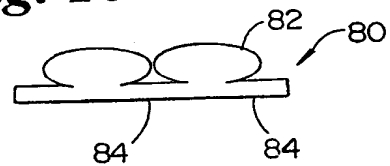
Fig. 11**Fig. 12****Fig. 13****Fig. 14****Fig. 15**

Fig. 16**Fig. 17****Fig. 18a****Fig. 18b**

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 98/18217

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A41D13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A41D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 974 829 A (G. W. TATE JR.) 17 August 1976 see column 2, line 17 - column 3, line 15 see column 3, line 40 - column 6, line 6; claims 4,7,8,11; figures 1-5 ----	1-3,12
A	EP 0 355 444 A (W. HERZBERG) 28 February 1990 see column 5, line 52 - column 6, line 28; figures 1,4 ----	1,6
A	FR 2 249 643 A (JOHNSON & JOHNSON) 30 May 1975 see claims 1-4,6,9,13; figures 1-9 ----	1,12,13
A	EP 0 776 616 A (UNI-CHARM) 4 June 1997 see column 3, line 37 - column 4, line 37; figures 2,3 -----	13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 1999

Date of mailing of the international search report

08/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Garnier, F

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/18217

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 3974829	A	17-08-1976	NONE		
EP 0355444	A	28-02-1990	DE	8809551 U	22-09-1988
			DE	8903326 U	24-05-1989
			AT	83356 T	15-01-1989
			US	4966140 A	30-10-1990
FR 2249643	A	30-05-1975	US	3888246 A	10-06-1975
			AT	350708 B	11-06-1979
			AT	877574 A	15-11-1978
			BE	821744 A	30-04-1975
			BR	7409127 A	04-11-1975
			CA	1033102 A	20-06-1978
			CH	580952 A	29-10-1976
			CS	178830 B	31-10-1977
			DE	2451403 A	07-05-1975
			DK	569074 A,B,	23-06-1975
			FI	319874 A,B,	02-05-1975
			GB	1473924 A	18-05-1977
			IE	40096 B	14-03-1979
			IN	142385 A	02-07-1977
			JP	1145759 C	12-05-1983
			JP	50078182 A	25-06-1975
			JP	57039777 B	23-08-1982
			NL	7414192 A,B,	06-05-1975
			PH	10832 A	09-09-1977
			RO	70408 A	17-08-1982
			SE	406273 B	05-02-1979
			SE	7413602 A	02-05-1975
			ZA	7407019 A	30-06-1976
EP 776616	A	04-06-1997	JP	9149945 A	10-06-1997
			JP	9149946 A	10-06-1997
			CA	2191541 A	31-05-1997
			SG	54396 A	16-11-1998
			US	5717991 A	17-02-1998